



ISO 9001: 2000
Certified

888-367-4286
281-367-4100
fax 281-292-2860

www.detcon.com
sales@detcon.com

Detcon Model IR-540

Carbon Dioxide Sensor

Non-dispersive Infrared Optical

(order by part number 965-405420-Range)

Specifications

Sensor Type

Non-dispersive Infrared Optical (NDIR)

Measurement Range

0 - 0.3%/0 - 1%/0 - 3%/0 - 5% by volume

Accuracy/Repeatability

±5% full scale

Response/Clearing Time

T50 <15 seconds

T90 <40 seconds

Zero Drift

<0.05% per year

Operating Temperature Range

-40°F to +167°F; -40°C to +75°C

Operating Humidity Range

0-99% RH non-condensing

Outputs

Linear 4-20 mA DC

Input Voltage

11.5-28 VDC

Power Consumption

<2.5 watts @ 24 VDC

Electrical Classification

Explosion proof

Class I, Division 1, Groups B, C, D

Safety Approvals


CSA/NRTL (US OSHA Certified)

Sensor Life/Warranty

Sensor: 5 year warranty pro-rated

Transmitter: 2 year warranty

Dimensions

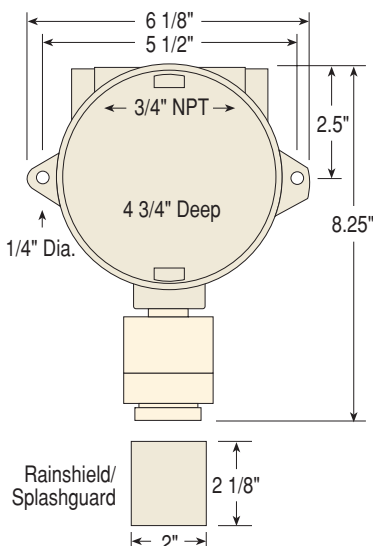

MicroSafe™ Intelligent Sensor

Description

Detcon Model IR-540 sensors are non-intrusive “Smart” sensors designed to detect and monitor Carbon Dioxide. Available ranges of detection are 0-0.3%, 0-1%, 0-3%, and 0-5% by volume.

The sensor assembly consists of a miniature infrared optical sensor in a stainless steel housing, a plug-in control transmitter circuit, a base connector board and an explosion proof enclosure.

Features

- CSA-NRTL Approved: Class I, Division 1, Groups B, C, & D
- Simple menu driven calibration - takes less than 3 minutes
- Backlit LCD and LED indicators for FAULT and CAL status
- Unique miniature field-replaceable optical sensor
- Plug-in field-replaceable transmitter
- Low power consumption
- 5-year expected sensor life

www.detcon.com