



# MODEL FP-624C

## COMBUSTIBLE GAS SENSOR

ISO 9001:2008  
Certified

888-367-4286  
713-559-9200  
fax 281-292-2860  
www.detcon.com  
sales@detcon.com

## SPECIFICATIONS

### Sensor Type

Matched-pair catalytic bead

### Measurement Range

0-100% LEL (lower explosive limit)  
Combustible Gas

### Accuracy/Repeatability

±3% 0-50% LEL  
±5% 50-100% LEL

### Response/Clearing Time

T50 <10 seconds  
T90 <30 seconds

### Zero Drift

<5% per year

### Operating Temperature Range

-40°F to +167°F; -40°C to +75°C

### Operating Humidity Range

0-99% RH non-condensing

### Outputs

Linear 4-20 mA DC  
RS-485 Modbus™  
3 Relays (alarm 1, alarm 2, & fault)  
Contacts rated 5 amps

### Input Voltage

22.5-28 VDC

### Power Consumption

3.1 watts max @ 24 VDC

### Electrical Classification

Explosion proof  
Class I, Division 1, Groups B, C, D


### Safety Approval

CSA and UL Approved

### Sensor Life/Warranty

Sensor: 2 year warranty  
Transmitter: 2 year warranty

## DIMENSIONS

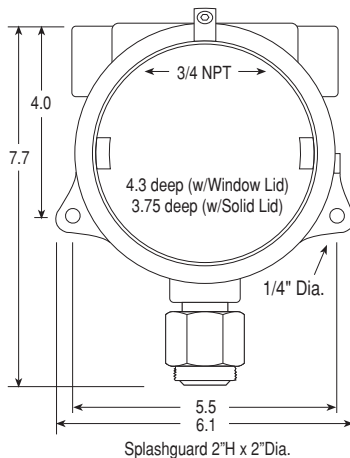

## Matched Pair Catalytic Bead

## MicroSafe™ Intelligent Sensor

## DESCRIPTION

Detcon Model FP-624C sensors are non-intrusive "Smart" sensors designed to detect and monitor combustible gas in air over the range of 0-100% LEL (lower explosive limit). The sensor assembly consists of a matched-pair catalytic bead sensor in a stainless steel housing that includes a splashguard with integral cal port, a plug-in control transmitter circuit, a base connector board and an explosion proof enclosure.



## FEATURES

- ▶ CSA and UL Approved: Class I, Division 1, Groups B, C, & D
- ▶ Compatible with PLCs, SCADA, DCS, via 4-20 mA, and/or RS-485, and/or alarm relays
- ▶ Sensor status and parameters accessible via RS-485 (Modbus™)
- ▶ Menu programmable relays standard (two alarms plus fault)
- ▶ Simple menu driven calibration - less than 3 minutes
- ▶ LED display and LED indicators for FAULT and CAL status
- ▶ Plug-in field-replaceable transmitter
- ▶ Long sensor life expectancy:
  - averaging longer than five years in harsh offshore drilling/production environments
- ▶ High resistance to poisons such as sulfides, chlorides, silicon-based contaminants etc.
- ▶ Low power consumption (less than 3.5 watts versus 8+ watts on competitive brands)

## ORDER GUIDE

PN 966-524520-100 Model FP-624C in Aluminum Junction Box  
PN 966-52452B-100 Model FP-624C-316SS in Stainless Steel Junction Box

[www.detcon.com](http://www.detcon.com)