



Detcon MODEL 1600A-N1P

GAS DETECTION ALARM AND CONTROL SYSTEM

ISO 9001: 2000
Certified

888-367-4286
713-559-9200
fax 281-292-2860
www.detcon.com
sales@detcon.com

DESCRIPTION

Detcon Model 1600A-N1P is a “user-configurable” multi-channel gas alarm control system. System capacity is 16 active channels. It can receive and supervise 4-20 milliamp DC inputs or it can be configured to poll up to 16 serial devices via RS-485 Modbus RTU.

The Model 1600A-N1P controller features a modular design that allows the user to customize their selection of stand-alone input and output modules. I/O modules are addressable. Three standard I/O functions are available; a 4-channel 4-20 mA input module (DA-4), a 4-alarm relay output module (RL-4), and 4-channel 4-20 mA output module (AO-4).

Modules are din-rail mounted and stackable allowing for seamless system expansion. These addressable I/O modules may be mounted externally on the main system enclosure or they may be packaged for remote mounting in a separate enclosure suitable for the area classification in which they will be installed. The remote mounting option can in some cases significantly reduce wiring and installation cost.

The status of each active input is displayed on a backlit LCD Touch Screen that also serves as a user interface. Typical input status indication includes channel number, tag name, gas type, concentration, and alarm status. Each input can be configured for up to 3 alarm levels. A fourth alarm is based on fault detection functions integral to the system. Each system application can include either common or discreet alarm relays or a combination of both. RS-485 or RS-232 serial output is provided for communication with PLC’s, PC’s, DCS’s, and remote screens.

The control system can be powered by 110/230 VAC or 20-30 VDC. Detcon’s full range of gas sensors, which are purchased separately, can be mixed and matched to create a gas detection system consisting of toxic gas, combustible gas, or oxygen deficiency. A wide range of field devices such as liquid level, temperature, pressure, flow etc. can also be configured for input to the control system. Features include one-touch Alarm Inhibit, Alarm Reset, and Alarm Silence (Acknowledge) functions.

The Model 1600A-N1P controller provides for a unique combination of user programming flexibility and customizable expansion capability, in a low-cost and simple-to-operate package.

FEATURES

- ▷ 1 to 16 channel input capacity
- ▷ 4-20 mA or Modbus RTU serial input capability
- ▷ Readily field expandable
- ▷ I/O modules can be located remotely from controller
- ▷ Large LCD with Touch-screen User Interface
- ▷ RS-232 or RS-485 serial output to other monitoring devices
- ▷ Alarm Inhibit, Alarm Acknowledge, and Alarm Reset Functions
- ▷ Lightning & overvoltage protection standard

ORDER GUIDE


PN 95P-161610-000 Model 1600A-N1P Control System

Addressable I/O Modules

PN 976-041400-000 Model DA-4 Four Channel 4-20 mA DC Input Module

PN 975-041400-000 Model RL-4 Four Alarm Relay Module

PN 975-041401-000 Model AO-4 Four Channel 4-20mA Output Module

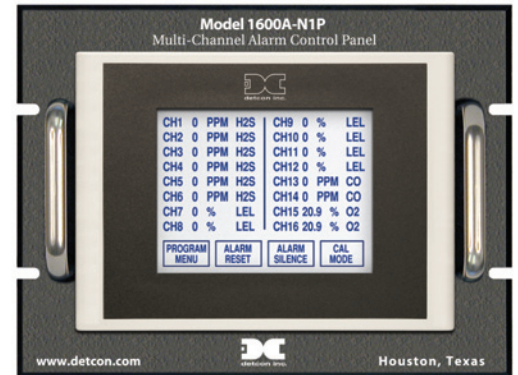

SPECIFICATIONS

Capacity

User Configurable:
up to 16 analog or serial inputs

Inputs

Analog 4-20 mA (using DA-4 Modules)
RS-485 Modbus™ RTU

Outputs

User Configurable:
4-20 mA outputs (using AO-4 Modules)
Form “C” Relay Contacts (using RL-4 Modules)
Standard: RS-485

Accuracy/Repeatability

Display: < 1% F.S.
DA-4: < 1% F.S.
AO-4: < 1% F.S.

Power Input

110-230 VAC; 20-30 VDC

Power Consumption

Base 1600A Controller: 20 Watts @ 24 VDC
Total Power dependent on:
Number of I/O Modules
Number of Gas Sensors
not to exceed 120 watts

Display

5 inch Backlit LCD
Touch-screen

Electrical Classification

NEMA 1 Panel Mount

Dimensions

10.5"W x 8"H x 14"D

Operating Temperature Range

0°C to +50°C

Warranty

One year

www.detcon.com